


Climate chamber mod. AND 610

Temperature from -10.0 ° C to + 120.0 ° C

Climatic chamber, humidostatic ideal for laboratory tests, shelf life, stability, conditioning, product quality tests.

It offers excellent control of Temperature ° C / ° F and Relative Humidity RH% RH% and allows you to work up to high temperatures of + 180 ° C (optional)

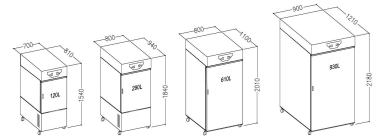

Construction features

- Compact floor model
- Internal chamber in AISI 304 stainless steel with rounded corners
- Efficient thermal insulation
- Silicone rubber gaskets
- Insulated door
- Door opening microswitch
- Special motor fan
- Air diffusion bulkheads
- Automatic heating
- Resistors with low surface load
- Automatic cooling
- Ecological CFC free refrigeration unit
- Steam humidification
- Automatic dehumidification on battery

Thermoregulation features

- Double Digital Display displays the set and internal temperatures at the same time
- 7 "wide Screen Color Panel
- Touch Screen Display
- Platinum PT100 temperature probe, Class A
- Independent safety thermostat
- RH% sensor of capacitive type, maintenance free
- Constant Temperature and Humidity Adjustment Function
- Thermo-Climatic Profiles Programming Function
- Data logging function
- Ethernet, USB and RS485 serial interface

The version without humidity control is available on request.

Made in Italy

Technical data

Temperature range	-10 ° C to + 120 ° C
OPTION ° C sterilization cycle	+ 180 ° C
Humidity field	20% ... 95%
Volume	610
Standard shelves	2
Shelves max	30
Diet	230V - 50 Hz
Power	3000
Internal dimensions W x D x H mm	660x660x1400
External dimensions W x D x H mm	800x1100x2010
Packaging dimensions W x D x H mm	1000x1300x2200
Net weight	230
Gross weight	260

Code	Description	Temperature range ° C	Volume L	Humidity range
G3HUET61	Climate chamber mod. AND 610	and -10 at +120	610	20%...95%