

# KERN PCB 10000-1-2023e

The standard in the laboratory, ideal for a wide range of applications for Industry 4.0



Weighing with tolerance range: yes

## Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C

## Power supply

Battery:	4x1.5 V AA
Charging time:	8 h
Input voltage:	100 V - 240 V AC 50 / 60 Hz
Mains adapter:	Mains adapter external
Mains adapter/adapter included:	UK EURO CH US
Operating time:	20 h
Operating time (Backlight off):	48 h
Operating time (Backlight on):	24 h
Rechargeable battery:	Rchrg. battery optional - intern

## Services (optional)

DAkkS Certificate:	963-128
--------------------	---------

## Category

Brand:	KERN
Category:	Balances
Product Group:	Precision balance

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	235 x 365 x 175 mm
Gross weight:	2,350 kg
Net weight:	1,400 kg
Shipping method:	Parcel service

## Construction

Casing material:	Plastic
Dimensions housing (WxDxH):	163 x 245 x 65 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Weighing surface (WxD):	150 x 170 mm

## Measuring system

Adjustment options:	External calibration
Eccentric loading at 1/3 [Max]:	400 mg
Linearity:	300 mg
Readability [d]:	100 mg
Recommended adjusting weight:	10 kg (F1)
Repeatability:	100 mg
Resolution:	100000
Stabilisation time under laboratory conditions:	3 s
Warm up time:	2 h
Weighing capacity [Max]:	10 kg
Weighing system:	Strain gauge
Weighing units:	tl (HK) m g kg mo lb tl (Singap. Malays) dwt tl (Tw) gn ffa ct oz ozt

## Display

Display digit height (large):	2,100 cm
-------------------------------	----------

## Counting

Counting resolution:	50000
Minimum piece weight at piece counting (Laboratory):	200 mg
Minimum piece weight at piece counting (Normal):	2 g
Reference weight:	yes

## Functions

Counting function:	yes
Percentage determination:	yes
PRE-TARE function:	yes
Vibration-free weighing (Animal weighing program):	yes


# KERN PCB 10000-1-2023e



The standard in the laboratory, ideal for a wide range of applications for Industry 4.0

## Piktogramme

### STANDARD

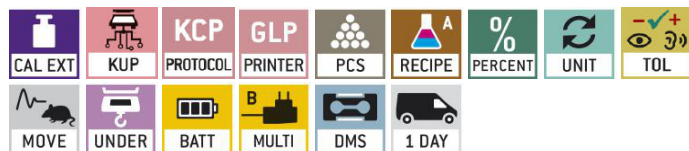

### OPTION

