


KERN PDS 300-3

KERN

Precision balance with flexible functionality and touch display

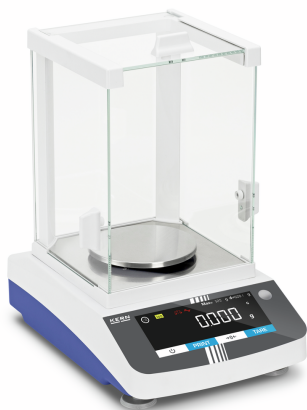

Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PDS

Measuring System

Weighing system	Force compensation
Weighing capacity [Max]	320 g
Readability [d]	0,001 g
Reproducibility	0,003 g
Linearity	± 0,003 g
Resolution	320.000

Adjustment options	Adjusting with external weight
--------------------	--------------------------------

Recommended adjusting weight	200 g (E2)
------------------------------	------------

Possible calibration points	200 g; 300 g
-----------------------------	--------------

Stabilization time	3 s
--------------------	-----

Warm-up time	120 min
--------------	---------

Eccentric loading at 1/3 [Max]	0,006 g
--------------------------------	---------

USP Minimum weight of sample (k = 2, U = 0.1%)	6 g
--	-----

Construction type of the scale	Single-range balance
--------------------------------	----------------------

Units	kg
	g
	mg
	gn
	dwt
	tl (Tw)
	ozt
	ct
	lb
	N

	oz
	ffa
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg
Default unit	g

Display

Display type	LCD
Display type	LCD
Display backlight	✓
Display screen size	140×48 mm
Display segments	7
Display digit height	20 mm
Languages of the user interface	English
	Symbol language

Construction

Dimensions completely mounted (W×D×H)	207×318×360 mm
Dimensions rectangular draught shield - inner (W×D×H)	174×162×228 mm
Dimensions rectangular draught shield - outer (W×D×H)	201×220×256 mm
Dimensions weighing surface (Ø)	115 mm
Dimensions weighing surface	115 mm
Material housing	ABS plastic
Material weighing plate	stainless steel
Material draught shield	glass
Material display housing	glass
Level indicator	✓
Levelling feet adjustable	✓

Functions

Sum memory function	✓
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Hook (included in delivery)
Function for averaging under unstable weighing conditions	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	32.000

KERN PDS 300-3

KERN

Precision balance with flexible functionality and touch display

Smallest piece weight when piece counting - laboratory conditions	10 mg
Smallest piece weight when piece counting - normal conditions	100 mg
Reference quantity	1 ... 100
Peak function	✓
Statistic function	✓
Auto-off interval(s) in mains power mode	off
Tare function	manual (multi)
Number of keys for operation	4

Interface

Interfaces	RS-232 standard USB-Device
------------	-------------------------------

Power Supply

Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
Power supply cable removable	removable
Input voltage device / power [Max]	12 V; 2 A
Power socket for mains adapter	Hollow plug, inside plus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 10,8 mm

Environmental conditions

Ambient temperature [Min]	15 °C
Ambient temperature [Max]	25 °C
Humidity of environment [Min]	15 %
Humidity of environment [Max]	80 %
Storage temperature [Min]	-10 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkkS calibration	963-127
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	325×443×396 mm
Shipping method	Parcel service
Net weight approx.	6 kg
Gross weight approx.	8 kg
Shipping weight	11,4 kg

Product information

GTIN/EAN number	4045761481893
REACH classification	no prohibited substances

Pictograms

STANDARD



OPTION



 **ENRICO BRUNO s.r.l.**
APPARECCHI SCIENTIFICI
SANITARI – INDUSTRIALI
www.enrico-bruno.it